

Optical Specification	
Model	OPT-CH03-110FC-F8
Optical Configuration	Bi-Telecentric
Working Distance (mm)	110±2
Magnification	0.3X
Sensor Ø (mm)	11.0(2/3")
Aperture	F8
Telecentricity	0.10°
NA	0.01875
Distortion	<0.1%
Depth of Field (mm)	7.33
Resolution (µm)	4.2
Image MTF30 (lp/mm)	120
Field of View Ø (mm)	36.67
O/I Distance (mm)	260.8
Mount	C-Mount
Weight (kg)	0.31
Size (mm)	Ø 52.0×133.3
Filter Thread (mm)	M49×0.5-6H
Working Temperature	0°C~+40°C

[1]Resolution:The resolution is the image resolution.

[2]DOF evaluation formula for telecentric lenses:

$$\text{DOF(mm)} = \frac{F\# \times P \times k}{\beta \times \beta}$$

F#:The real F-number of a lens when used

P:Sensor pixel size (5.5 µm used here)


β:Lens magnification

k:The parameter based on application (measurement,

k=0.015; defect detection, k=0.008; 0.015 used here)

At the borders of DOF,the image can still be used for measurement.But only half of the nominal DOF should be used to get a sharp image.

[3]The lens supports dedicated surface illumination. For objects with low reflectivity, a dedicated surface light source is recommended for better illumination. Optional OPT-FL3118-CH-X is available as an option.

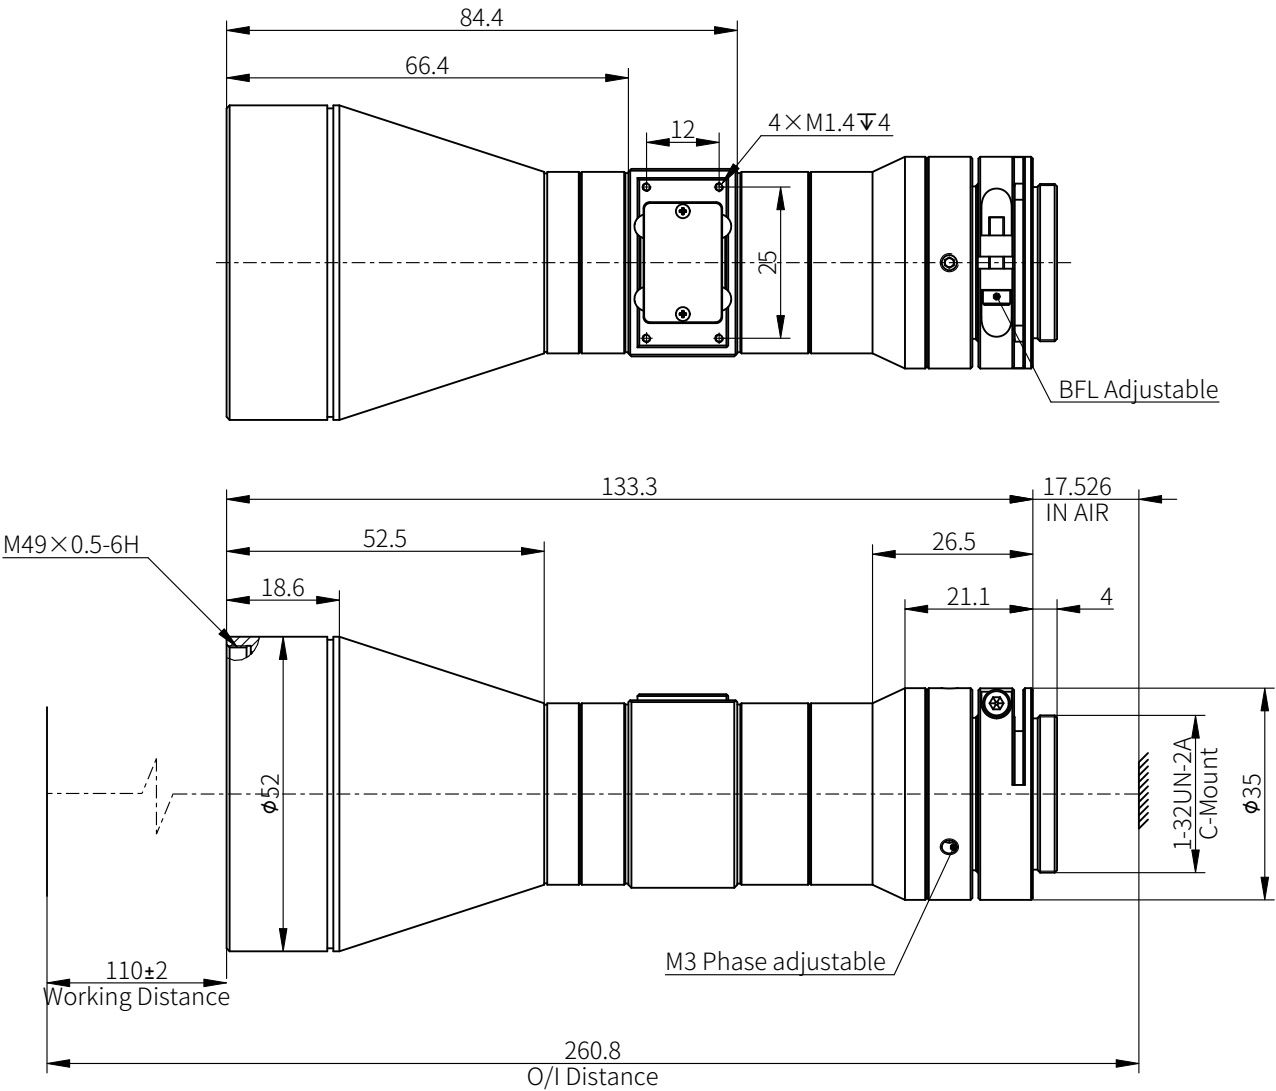


View Angle		Item	Signature	Date	OPT Machine Vision Tech Co., Ltd.			
		Drawing						
Standard Difference	IT14	Design			All Rights Reserved			
		Check						
Drawing Code		Scale	4:5		Name	OPT-CH03-110FC-F8		
		Paper Size	A4		Unit	mm	Page 1 / 2	Version V1.0

A				B	C	D			
Model	Color	Voltage	Power			JST SMR-02V-B, 2 Pin or Compactible Connector 	Pin	Polarity	Wire Color
OPT-FL3118-CH-R	Red	24V	2.88W				1	+	/
OPT-FL3118-CH-G	Green	24V	2.88W				2	-	/
OPT-FL3118-CH-B	Blue	24V	2.88W						
OPT-FL3118-CH-W	White	24V	2.88W						

JST SMR-02V-B, 2 Pin
or Compactible Connector



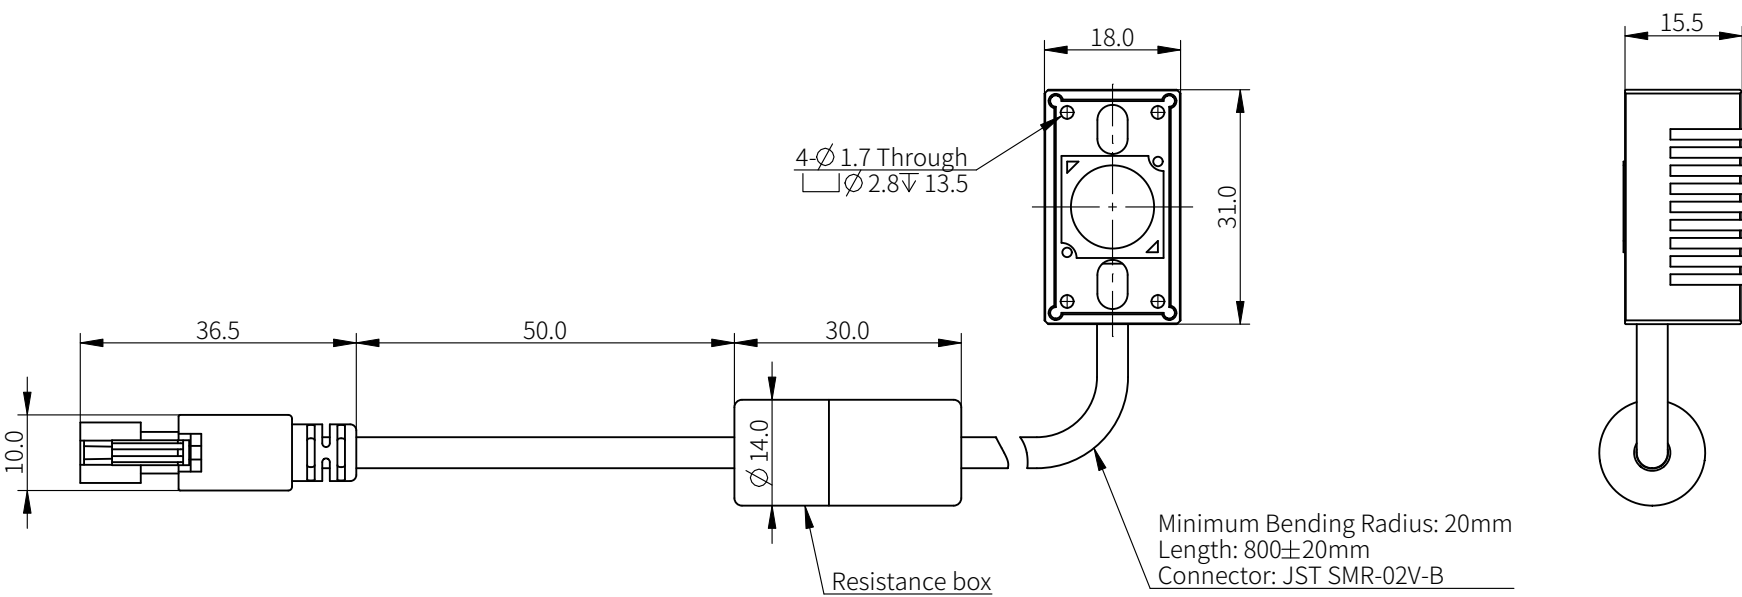

View Angle	 	Item	Signature	Date	 OPT Machine Vision Tech Co., Ltd.				
		Drawing							
Standard Difference	IT14	Design			All Rights Reserved				
		Check							
Drawing Code		Scale			Name	OPT-FL3118-CH-X			
		Paper Size	A4		Unit	mm	Page 2 / 2	Version	V1.0.1