

Optical Specification	
Model	OPT-CH10-65-F16
Optical Configuration	Telecentric
Working Distance (mm)	65±2
Magnification	1.0X
Sensor Ø(mm)	11.0(2/3")
Aperture	F16
Telecentricity	0.10°
NA	0.03117
Distortion	<0.1%
Depth of Field (mm)	1.32
Object Resolution (μm)	10.76
Resolution (μm)	8.30
Image MTF30(lp/mm)	60
Field of View Ø(mm)	11.00
O/I Distance (mm)	177.5
Mount	C-Mount
Weight (kg)	0.10
Size (mm)	Ø29.0×94.93
Filter Thread (mm)	M27×0.5-6H
Working temperature	-20℃～+60℃

Optical Specification	
Model	OPT-CH10-65-F16
Optical Configuration	Telecentric
Working Distance (mm)	65±2
Magnification	1.0X
Sensor Ø(mm)	11.0(2/3")
Aperture	F16
Telecentricity	0.10°
NA	0.03117
Distortion	<0.1%
Depth of Field (mm)	1.32
Object Resolution (μm)	10.76
Resolution (μm)	8.30
Image MTF30(lp/mm)	60
Field of View Ø(mm)	11.00
O/I Distance (mm)	177.5
Mount	C-Mount
Weight (kg)	0.10
Size (mm)	Ø29.0×94.93
Filter Thread (mm)	M27×0.5-6H
Working temperature	-20℃～+60℃

[2]WD: The distance between the front end of the mechanism and the object.

[3]DOF evaluation formula for telecentric lenses:

$$\text{DOF(mm)} = \frac{F\# \times P \times k}{\beta \times \beta}$$

F#:The real F-number of a lens when used


P:Sensor pixel size(5.5 μm used here)

 β : Lens magnification

k: The parameter based on application (measurement,

k=0.015;defect detection, k=0.008;0.015 used here)

At the borders of DOF, the image can still be used for measurement. But only half of the nominal DOF should be used to get a sharp image.

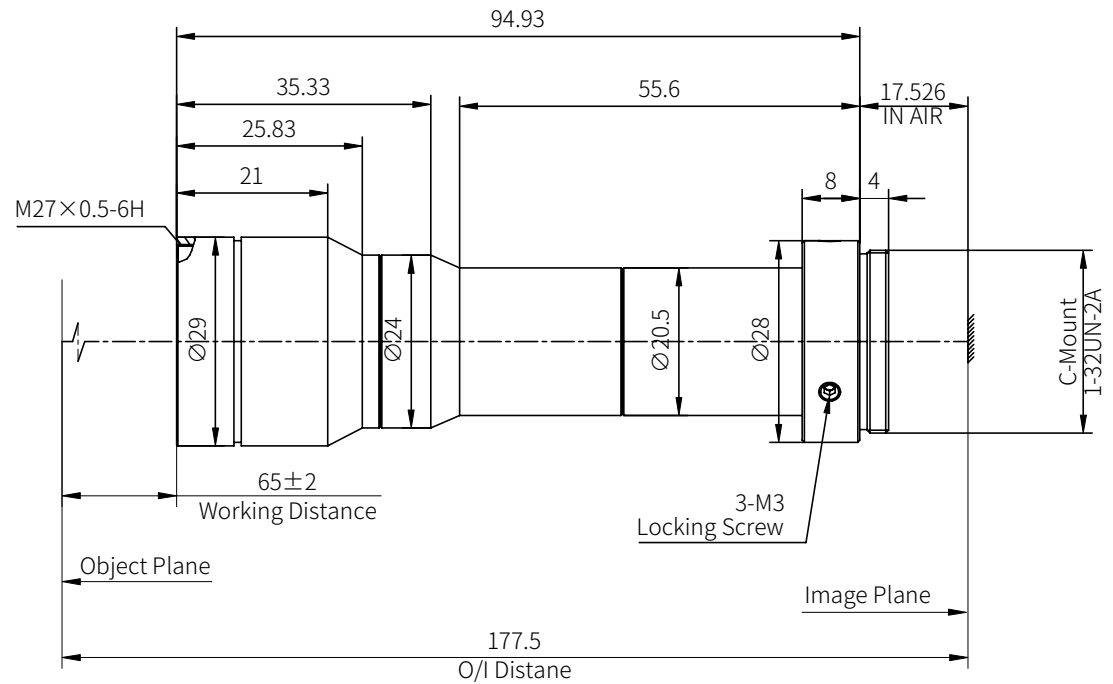

View Angle		Item	Signature	Date	 OPT Machine Vision Tech Co., Ltd.				
		Drawing							
Standard Difference	IT14	Design			All Rights Reserved				
		Check							
Drawing Code		Scale			Name	OPT-CH10-65-F16			
		Paper Size	A4		Unit	mm	Page	1 / 1	Version



OPT Machine Vision Tech Co., Ltd.

All Rights Reserved

OPT-CH10-65-F16

Page 1 / 1

Version	1.0
---------	-----