


Optical Specification	
Model	OPT-CH15-110C-F32
Optical Configuration	Telecentric
Working Distance (mm)	110±2
Magnification	1.5X
Sensor Ø(mm)	11.0(2/3")
Aperture	F32
Telecentricity	0.10°
NA	0.02341
Distortion	<0.1%
Depth of Field (mm)	1.17
Object Resolution (μm)	14.33
Resolution (μm)	15.6
Image MTF30(lp/mm)	32
Field of View Ø(mm)	7.33
O/I Distance (mm)	273.6
Mount	C-Mount
Weight (kg)	0.31
Size (mm)	Ø37.0×146.1
Filter Thread (mm)	M34×0.5-6H
Working temperature	-20°C~+60°C

- [1]Resolution:The resolution is the image resolution.
[2]WD:The distance between the front end of the mechanism and the object.
[3]DOF evaluation formula for telecentric lenses:

DOF(mm)= $\frac{F\# \times P \times k}{\beta \times \beta}$

F#:The real F-number of a lens when used
P:Sensor pixel size(5.5 μm used here)
β:Lens magnification

k:The parameter based on application (measurement, k=0.015;defect detection, k=0.008;0.015 used here)
At the borders of DOF,the image can still be used for measurement. But only half of the nominal DOF should be used to get a sharp image.

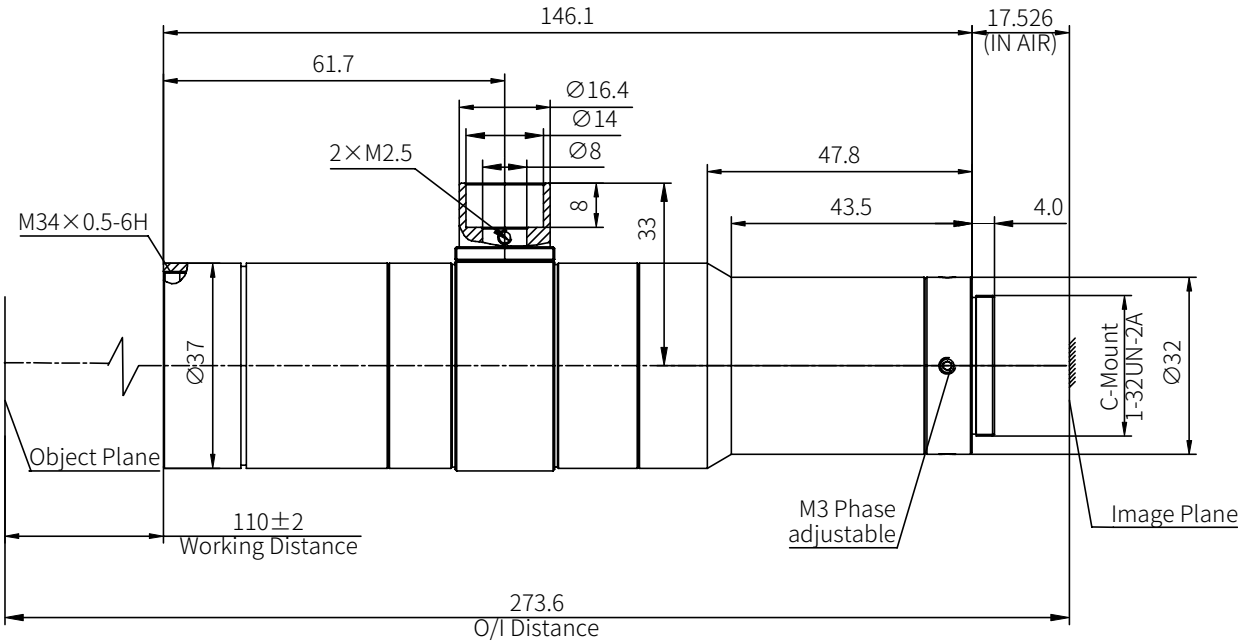

View Angle		Item	Signature	Date	 OPT Machine Vision Tech Co., Ltd.				
		Drawing							
Standard Difference	IT14	Design			All Rights Reserved				
		Check							
Drawing Code		Scale			Name	OPT-CH15-110C-F32			
		Paper Size	A4		Unit	mm	Page	1 / 1	Version 1.0