


A		B	C	D
Optical Specification				
Model	OPT-HP08-110C-F11			
Optical Configuration	Bi-Telecentric			
Working Distance (mm)	110±2			
Magnification	0.8X			
Sensor Ø (mm)	18.4(1.1")			
Aperture	F11			
Telecentricity	0.10°			
NA	0.03636			
Distortion	<0.1%			
Depth of Field (mm)	1.42			
Resolution (µm)	5.5			
Image MTF30 (lp/mm)	90			
Field of View Ø (mm)	23.00			
O/I Distance (mm)	279			
Mount	C-Mount			
Weight (kg)	0.57			
Size (mm)	Ø 60×151.5			
Filter Thread (mm)	M56×0.75-6H			
Working Temperature	-20℃~+60℃			

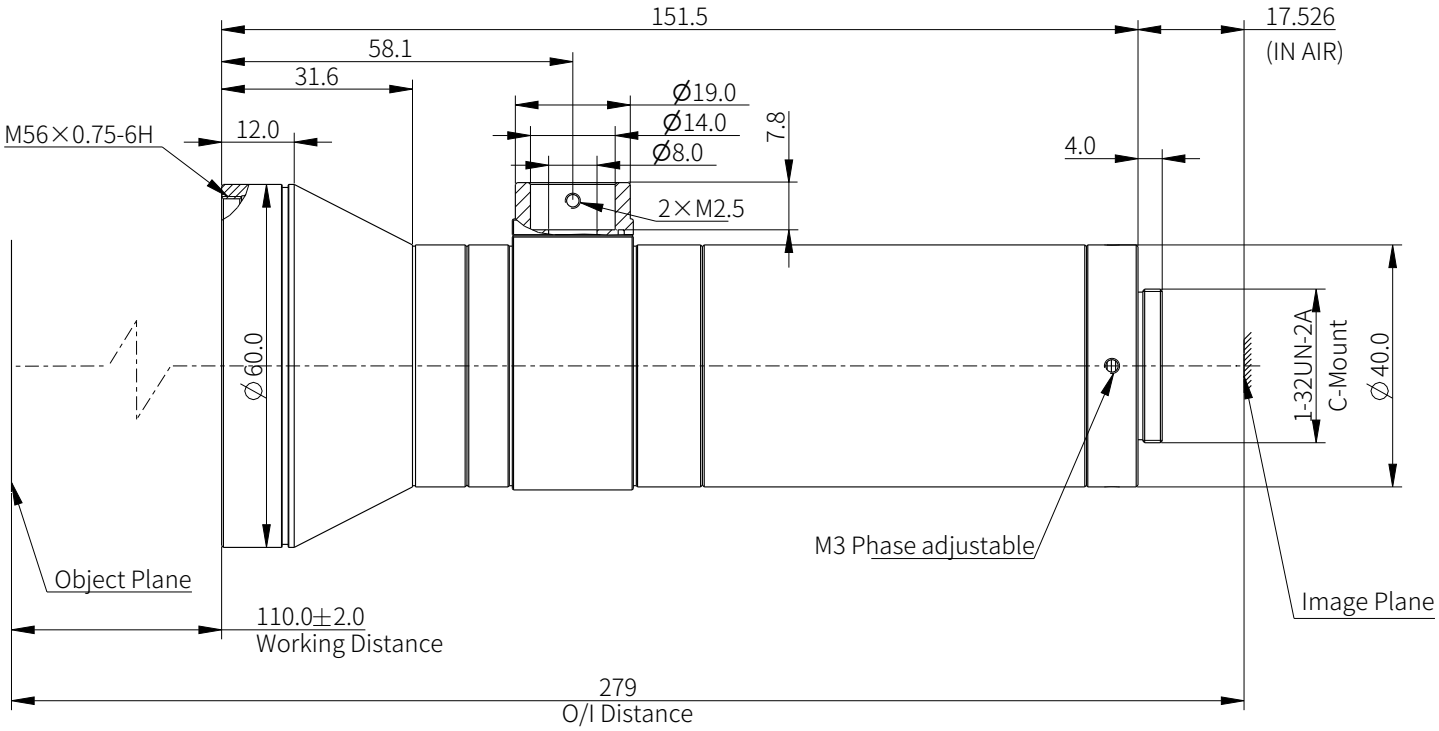

[1]Resolution:The resolution is the image resolution.
[2]DOF evaluation formula for telecentric lenses:

DOF(mm)= $\frac{F\# \times P \times k}{\beta \times \beta}$

F#:The real F-number of a lens when used
P:Sensor pixel size (5.5 µm used here)
β:Lens magnification
k:The parameter based on application (measurement, k=0.015; defect detection, k=0.008; 0.015 used here)

At the borders of DOF,the image can still be used for measurement. But only half of the nominal DOF should be used to get a sharp image.

View Angle		Item	Signature	Date	 OPT Machine Vision Tech Co., Ltd.			
		Drawing						
Standard Difference	IT14	Design			All Rights Reserved			
		Check						
Drawing Code		Scale	4:5		Name	OPT-HP08-110C-F11		
		Paper Size	A4		Unit	mm	Page 1 / 1	Version V1.0