
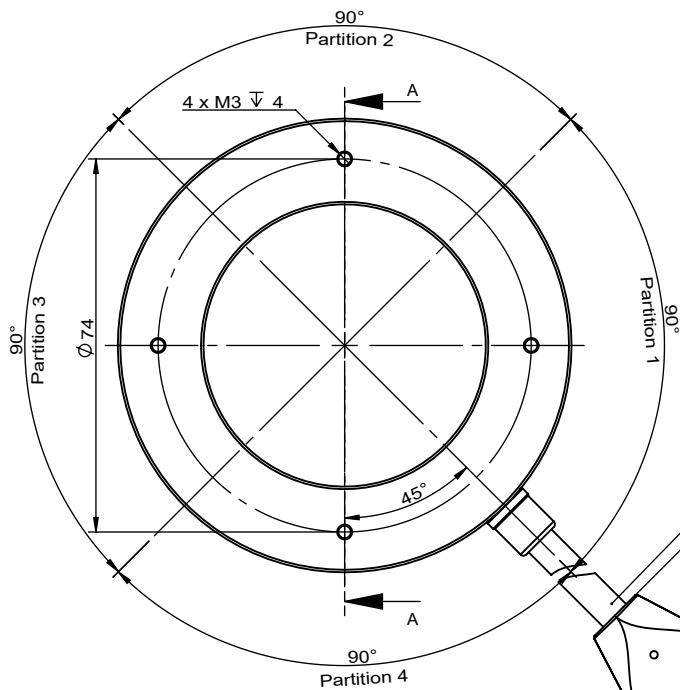


Model	Color	Voltage	Power
OPT-MSRI9045-W	White	24V	7.2W
OPT-MSRI9045-R	Red	24V	4.7W
OPT-MSRI9045-G	Green	24V	6.9W
OPT-MSRI9045-B	Blue	24V	7.7W

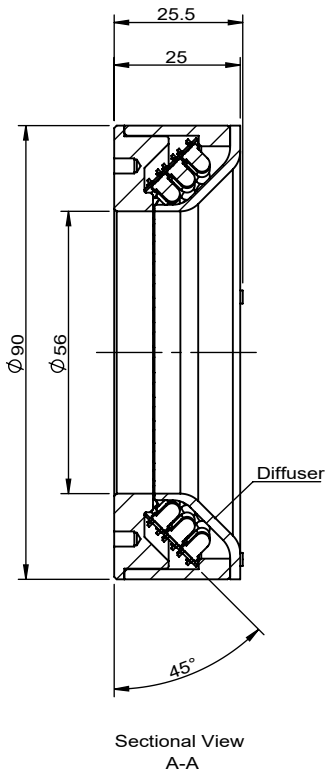

Minimum Bending Radius : 40mm
Length: 600±20mm

Minimum Bending Radius : 20mm
Length: 300±20mm
Connector: JST SMR-02V-B

Labels on branch lines (1,2,3,4)
The approximate location of the corresponding partition (1,2,3,4)

JST SMR-02V-B, 2 Pin or Compactible Connector		Pin	Polarity
		1	+
		2	-

View Angle			Standard Difference	IT14	Remark	OPT MACHINE VISION
Paper Size		A 4	Scale	1:1.5	1. Advised Controller: OPT-DPA2024E OPT-AP1024F 2. With Diffuser 3. The Emitting surface is evenly divided into 4 parts, Each part can be individually controlled, Or use multiple regions together.	OPT-MSRI9045-X
Drawing Code	KFBZ20240118KF3807	Drawing Date	2018/8/28	Revised Date	2024/1/18	
						Version V1.0U