



Model	Color	Voltage	Power
OPT-MSRID100-W	White	24V	9W
OPT-MSRID100-R	Blue	24V	8.6W
OPT-MSRID100-G	Green	24V	7.4W
OPT-MSRID100-B	Red	24V	8.8W

JST SMR-02V-B, 2 Pin or Compactible Connector		Pin	Polarity
	2	1	+
	1	2	-

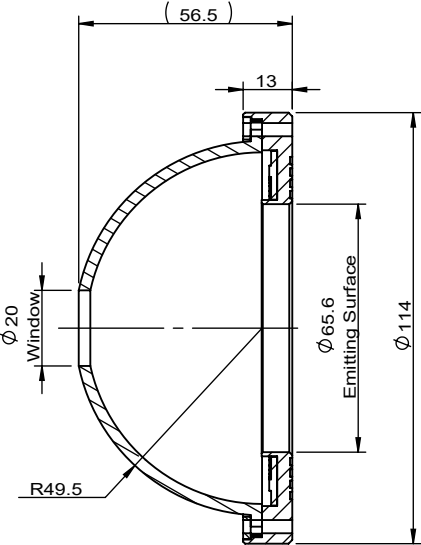


Sectional View
A-A

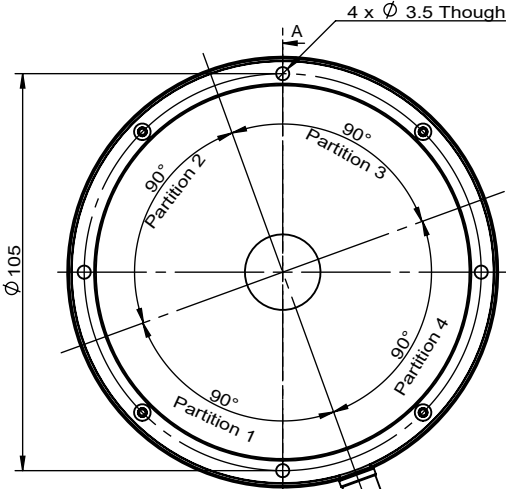

Minimum Bending Radius : 40mm
Length: 600±20mm

Labels on branch lines (1,2,3,4)
The approximate location of the corresponding partition (1,2,3,4)

4-Minimum Bending Radius : 20mm
Length: 300±20mm
Connector: JST SMR-02V-B

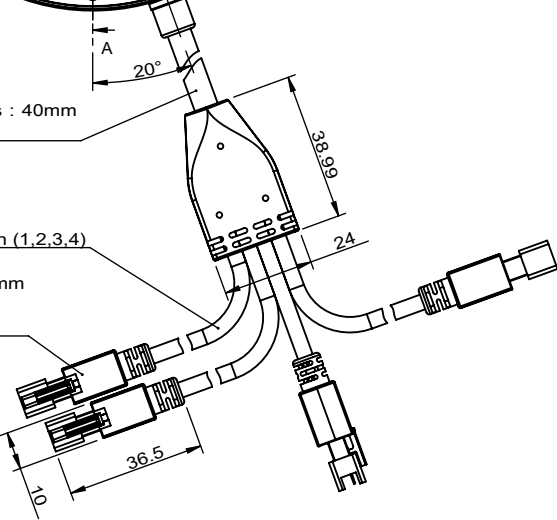

Copyright © 2011 by OPT All Rights Reserved		View Angle		Standard Difference	IT14	Remark	 OPT MACHINE VISION OPT-MSRID100-X
		Paper Size	A 4	Scale	1:2	1.Advised Controller: OPT-DPA2024E OPT-AP1024F 2.With Diffuser 3.The Emitting surface is evenly divided into 4 parts,Each part can be individually controlled,Or use multiple regions together.	
Drawing Code	KFBZ20240117KF3805	Drawing Date	2019/3/25	Revised Date	2024/1/17	Version V1.0	