



Model	Color	Voltage	Power
OPT-RID240-W	White	24V	25.2W
OPT-RID240-R	Red	24V	22.1W
OPT-RID240-G	Green	24V	17.8W
OPT-RID240-B	Blue	24V	26.6W

JST SMR-02V-B, 2 Pin or Compactible Connector		Pin	Polarity
	2	1	+
		2	-

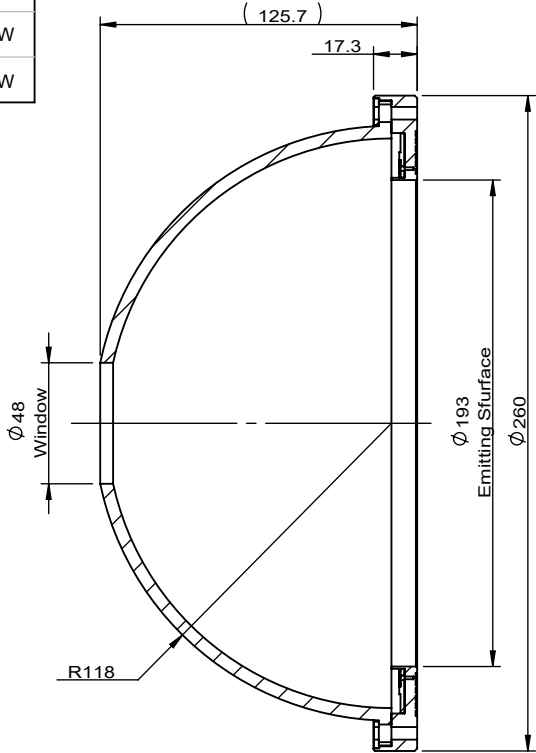

Sectional View
A-A

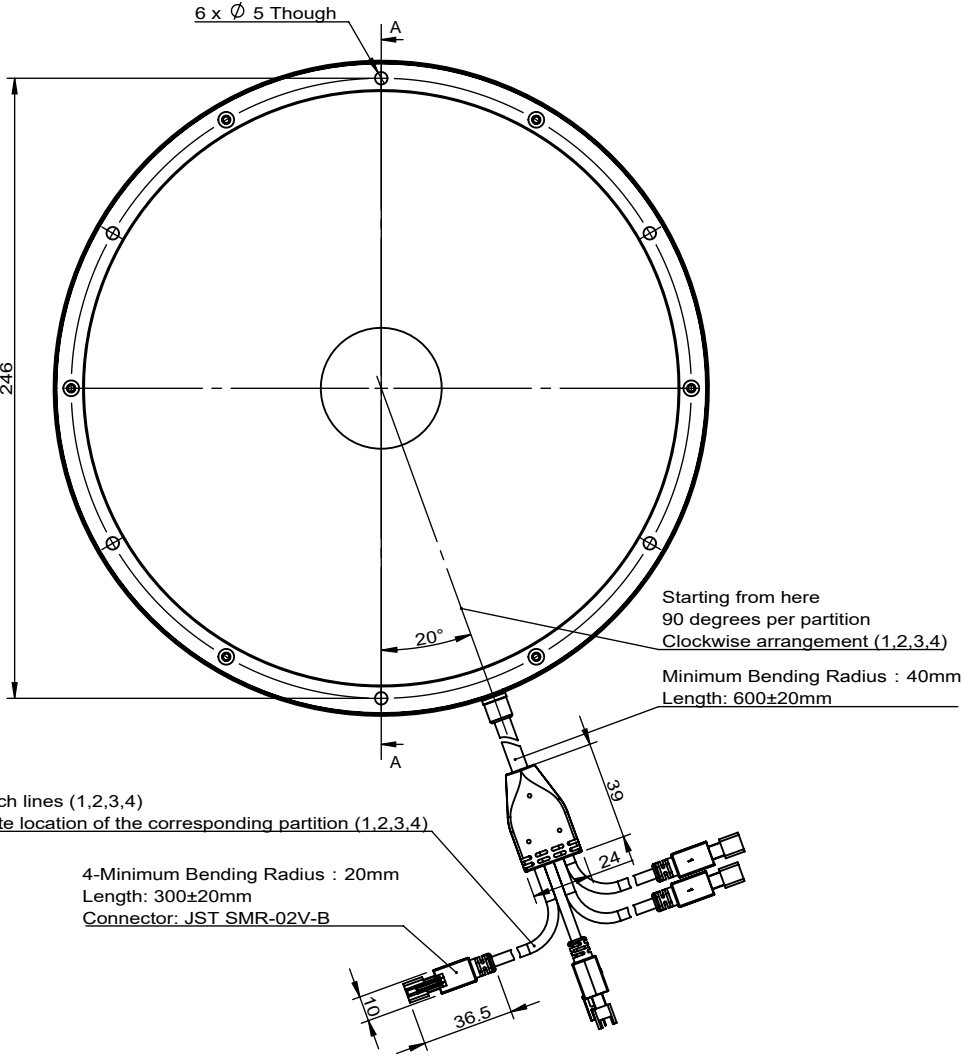

Labels on branch lines (1,2,3,4)
The approximate location of the corresponding partition (1,2,3,4)

4-Minimum Bending Radius : 20mm
Length: 300±20mm
Connector: JST SMR-02V-B

Copyright © 2011 by OPT All Rights Reserved		View Angle		Standard Difference	IT14	Remark	 OPT MACHINE VISION OPT-MSRID240-X	
		Paper Size	A 4	Scale	1:5	1.Advised Controller: OPT-DPA2024E OPT-AP1024F 2.With Diffuser 3.The Emitting surface is evenly divided into four parts,Each part can be individually controlled,Or use multiple regions together.		
Drawing Code	KFBZ20231010KF3805	Drawing Date	2019/3/26	Revised Date	2023/10/10	VersionV1.0		