



Model	Color	Voltage	Power
OPT-MSRID80-W	White	24V	5.8W
OPT-MSRID80-R	Red	24V	5.1W
OPT-MSRID80-G	Green	24V	4.8W
OPT-MSRID80-B	Blue	24V	5.8W

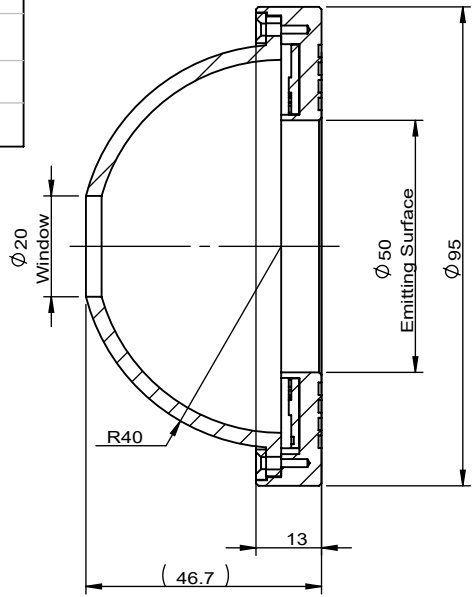

Sectional View
A-A

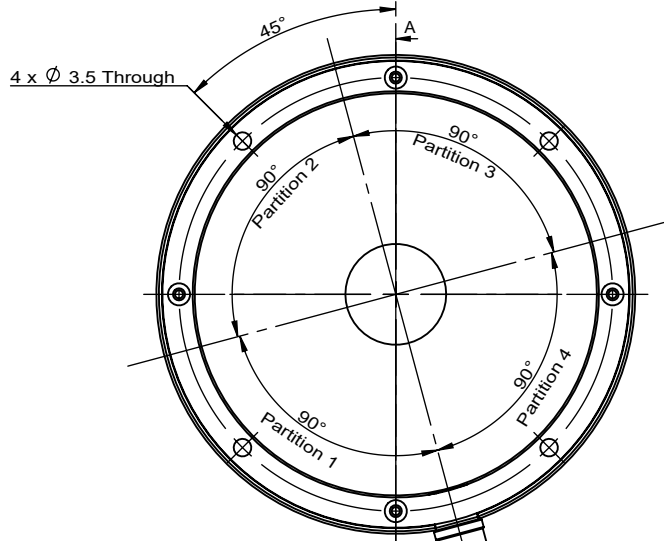


JST SMR-02V-B, 2 Pin or Compactible Connector		Polarity
1	2	+
2	1	-

Minimum Bending Radius : 40mm
Length: 600±20mm

4-Minimum bending radius : 20mm
length: 800 ±20mm
connector: JST SMR-020V-B,2 Pin

Labels on branch lines (1,2,3,4)
The approximate location of the corresponding partition (1,2,3,4)

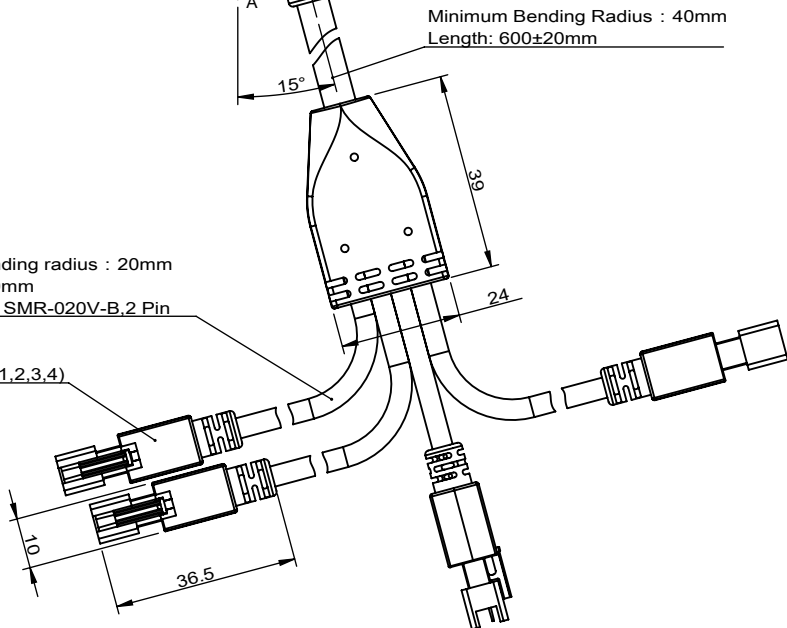

Copyright © 2011 by OPT All Rights Reserved		View Angle		Standard Difference	IT14	Remark 1.Advised Controller: OPT-DPA2024E OPT-AP1024F 2.With Diffuser 3.The Emitting surface is evenly divided into 4 parts,Each part can be individually controlled,Or use multiple regions together.	 OPT MACHINE VISION OPT-MSRID80-X	
		Paper Size	A 4	Scale	1:1.5			
Drawing Code	KFBZ20240117KF3806	Drawing Date	2021/4/17	Revised Date	2024/1/17	Version		V1.0