


| Model      | Color | Current | Power |
|------------|-------|---------|-------|
| OPT-SL10-W | White | 0.7A    | 8.4W  |
| OPT-SL10-R | Red   | 0.7A    | 7W    |
| OPT-SL10-G | Green | 0.7A    | 8.4W  |
| OPT-SL10-B | Blue  | 0.7A    | 8.4W  |


JST SMR-03V-B, 3 Pin  
or Compatible Connector




| Pin | Polarity |
|-----|----------|
| 1   | +        |
| 2   | /        |
| 3   | -        |

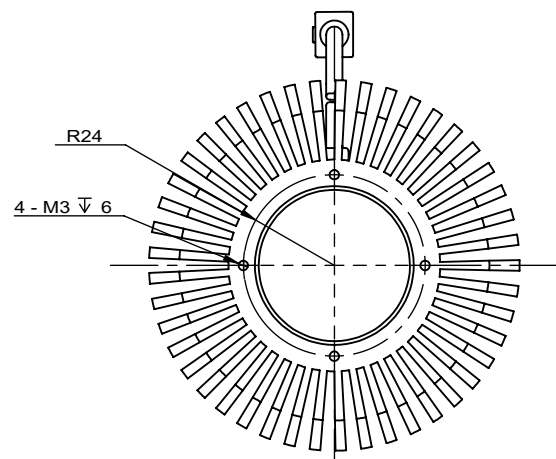

Minimum Bending Radius : 20mm  
Length: 800±20mm  
Connector: JST SMR-03V-B

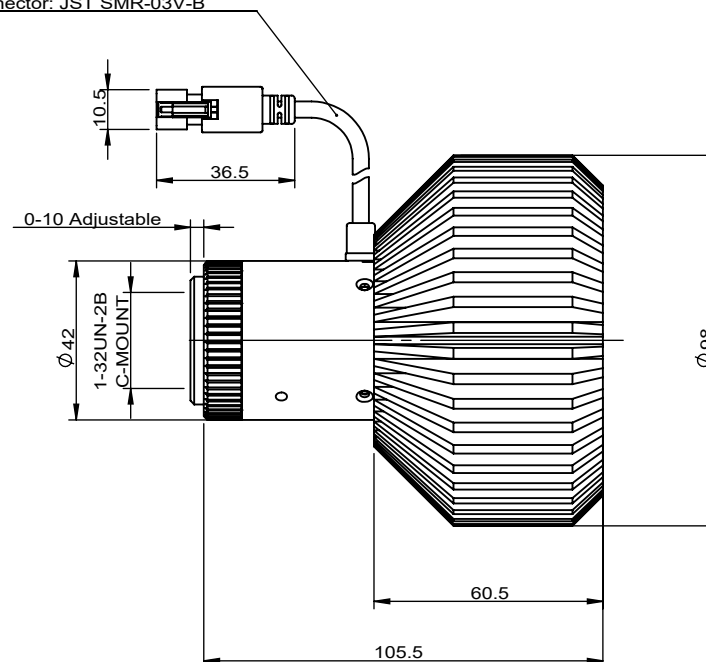

|              |                                                                                     |                     |           |                                                                                                   |
|--------------|-------------------------------------------------------------------------------------|---------------------|-----------|---------------------------------------------------------------------------------------------------|
| View Angle   |  | Standard Difference | IT14      | Remark<br><br>1.Using with lens and grid<br>2.Advised Controller:<br>OPT-DPA1012E<br>OPT-DPA2012E |
| Paper Size   | A 4                                                                                 | Scale               | 1:1       |                                                                                                   |
| Drawing Date | 2016/8/3                                                                            | Revised Date        | 2020/9/24 |                                                                                                   |



OPT MACHINE VISION

OPT-SL10-X

Version V1.1

Copyright © 2011 by OPT  
All Rights Reserved