


| Model          | Color | Voltage | Power |
|----------------|-------|---------|-------|
| OPT-MSRIP230-W | White | 24V     | 29.5W |
| OPT-MSRIP230-R | Red   | 24V     | 22.2W |
| OPT-MSRIP230-G | Green | 24V     | 23.7W |
| OPT-MSRIP230-B | Blue  | 24V     | 29.2W |

| JST SMR-02V-B, 2 Pin<br>or Compactible Connector                                   |   | Pin | Polarity |
|------------------------------------------------------------------------------------|---|-----|----------|
|  | 2 | 1   | +        |
|                                                                                    |   | 2   | -        |

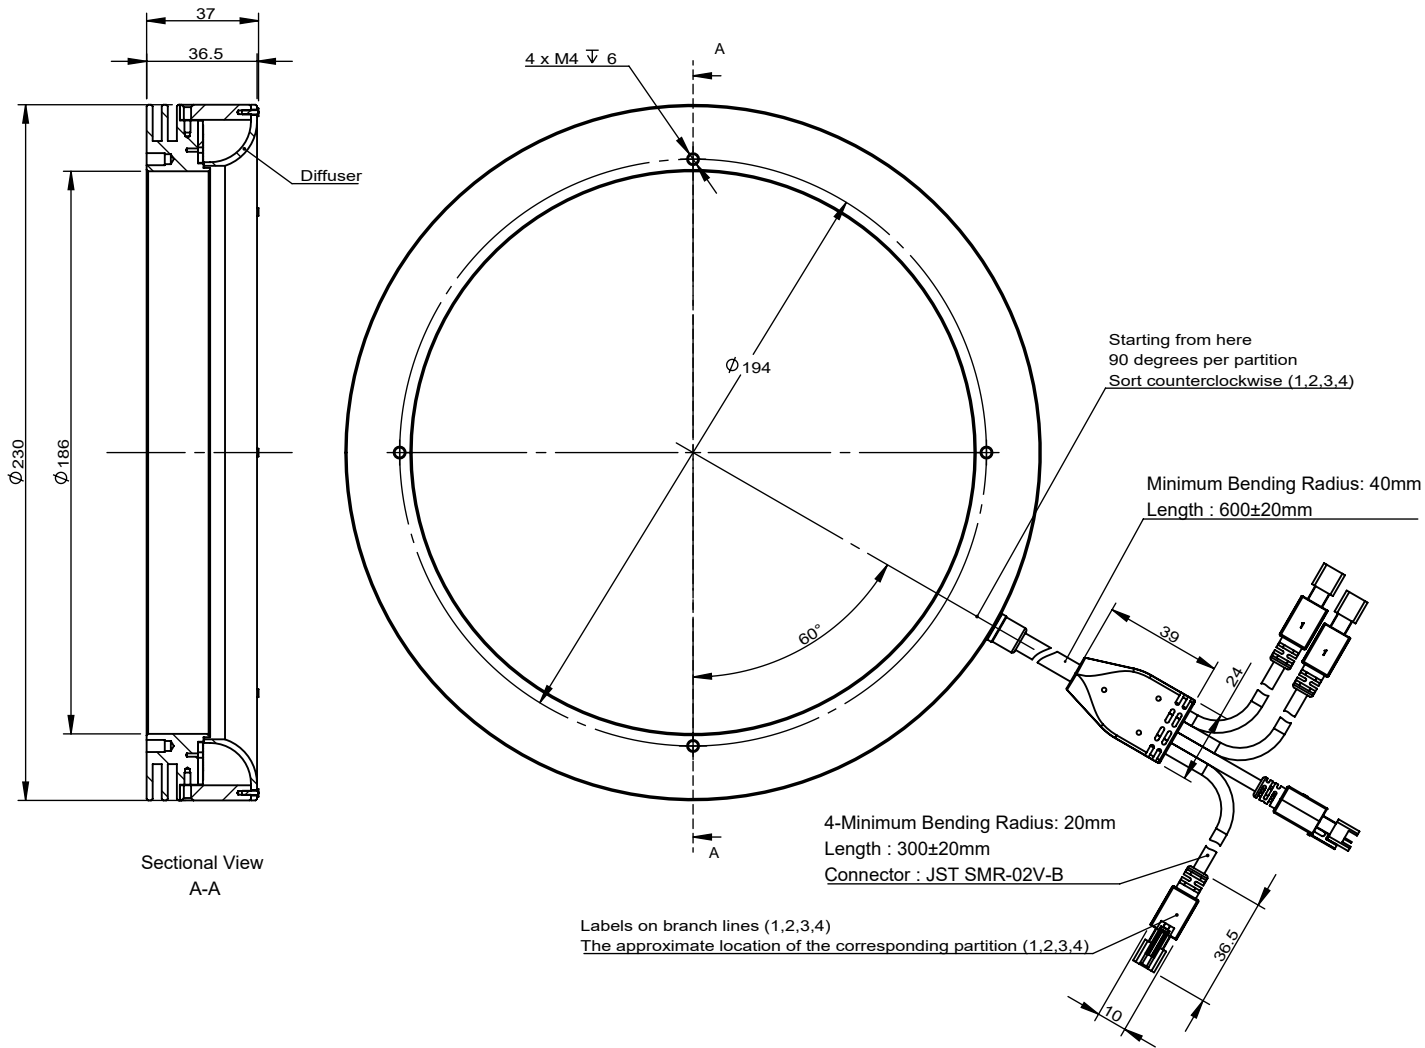

|                                                |                    |              |                                                                                     |                     |            |                |                                                                                                                                                                                                                |  |  |  |         |      |
|------------------------------------------------|--------------------|--------------|-------------------------------------------------------------------------------------|---------------------|------------|----------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--|--|--|---------|------|
|                                                |                    | View Angle   |  | Standard Difference | IT14       | Remark         |  OPT <sup>®</sup> MACHINE VISION                                                                                          |  |  |  |         |      |
|                                                |                    |              |                                                                                     |                     |            |                | 1.Advised Controller:<br>OPT-DPA2024E<br>OPT-AP1024F<br>2.With Diffuser<br>3.The Emitting surface is evenly divided into four parts,Each part can be individually controlled,Or use multiple regions together. |  |  |  |         |      |
| Copyright © 2011 by OPT<br>All Rights Reserved |                    | Paper Size   | A <sub>4</sub>                                                                      | Scale               | 1:2.5      | OPT-MSRIP230-X |                                                                                                                                                                                                                |  |  |  |         |      |
| Drawing Code                                   | KFBZ20231115KF3809 | Drawing Date | 2019/7/23                                                                           | Revised Date        | 2023/11/15 |                |                                                                                                                                                                                                                |  |  |  | Version | V1.0 |