




OPT CH1 Industrial Area Scan Camera

OPT-CH1-M250-XGG3-02

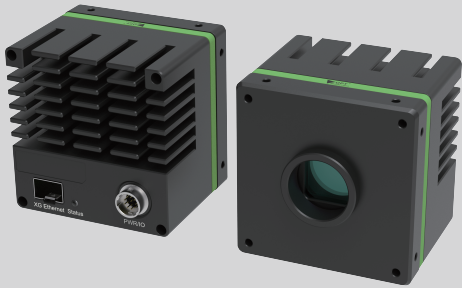


- 10Gbps bandwidth optical fiber transmission, with a transmission distance of up to 100 meters.
- Using light as transmission signal, it is not subject to electromagnetic interference, and the transmission is more stable
- Supports software trigger/hardware trigger/free-run capture and other acquisition modes.
- Supports ISP (Image Signal Processing) functions such as gamma correction, LUT (Look-Up Table), etc.
- Support multiple image data formats output/ROI/Mirror, etc.
- Compatible with GigE Vision protocol and GenICam standard.
- Conform to CE, RoHS

Specification


Model	Sensor	Sensor Type	Shutter	Resolution	Frame rate (fps)	Bit Depth (bit)	Interface	Mono/Color	Pixel size (μm)	Sensor Size
OPT-CH1-M250-XGG3-02	GMAX0505	CMOS	Global	5120×5120	43.4	8/10/12	10GigE(SFP+)	Mono	2.5 × 2.5	1.1"

Model	OPT-CH1-M250-XGG3-02									
Effective Pixels	25MP									
SNR	> 39dB									
Dynamic Range	65dB									
GPIO	12 pin Hirose: 2 x Opto-isolated input, 2 x Opto-isolated output									
Image Format	Mono8/10/10Packed/12/12Packed									
ROI	Support									
Gamma	from 0 to 3.999									
Exposure Time	16μs~10s									
Trigger Mode	Software Trigger/Hardware Trigger/Free Run Mode									
User Setting	Supports saving 3 sets of user-defined configurations									
Dimensions	76mm×76mm×63mm (not including lens mount and rear case connector)									
Power Supply	DC power supply through 12 pin Hirose interface, voltage range 12V ~ 24V									
Power Consumption	24V≈6.5W									
Lens Mount	C									
Standards	Compliant with GigE Vision, GenICam									
Temperature	Storage Temperature: -30℃~+80℃; Operating Temperature: 0℃~+50℃									


Spectrogram

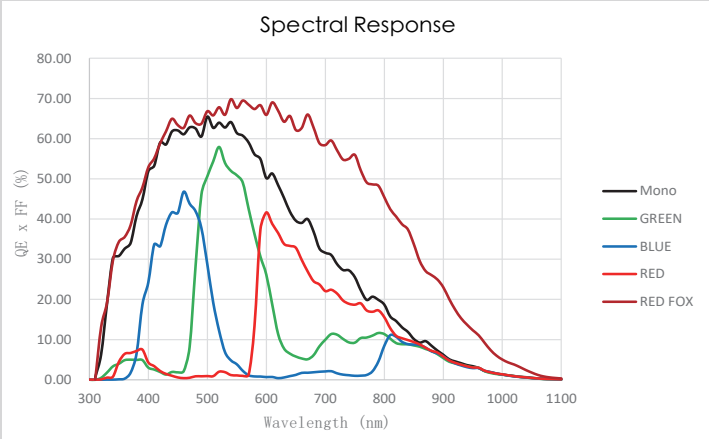

Dimensions (mm)

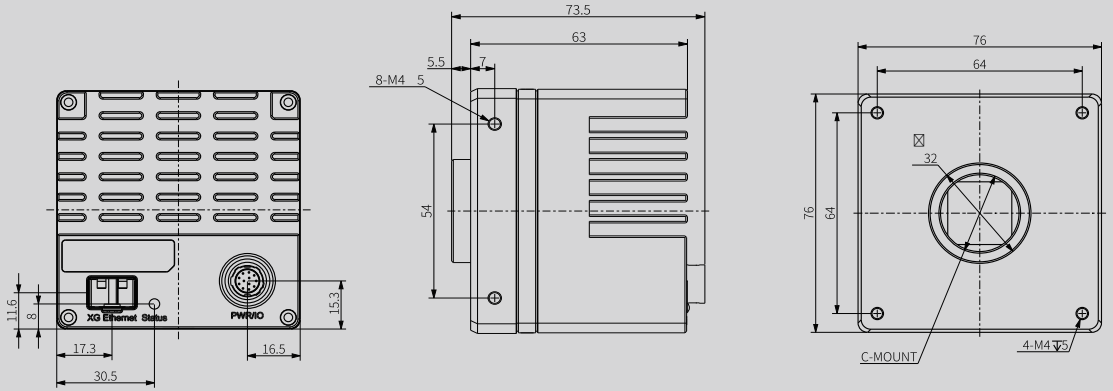

IO Interface Instruction(mm)

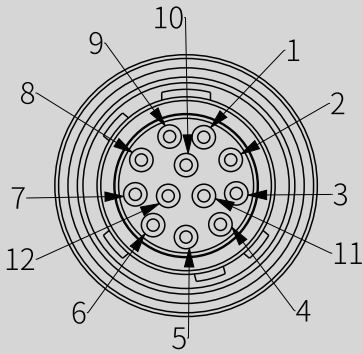

PIN	Signal	Description
1	GND	Camera DC power ground
2	POWER	DC 24Vpower supply
3	NC	reserved
4	NC	reserved
5	NC	reserved
6	NC	reserved
7	OUT_GND	Opto-isolated output signal ground
8	LineOut1	Opto-isolated output1
9	LineOut2	Opto-isolated output2
10	IN_GND	Opto-isolated input signal ground
11	Line2	Opto-isolated input2
12	Line1	Opto-isolated input1



OPT Machine Vision Tech Co.,Ltd.

No. 66 Xingfa Sounth Road, Chang'an Town, Dongguan City, Guangdong Province, China
Tel: +86-769-82716188 Fax: +86-769-81606698
Email: optmv@optmv.com Web: www.optmv.com



OPT官网



微信公众号