


Optical Specification	
Model	OPT-HP40-65-F12
Optical Configuration	Telecentric
Working Distance (mm)	65± 2
Magnification	4.0X
Sensor Ø (mm)	18.4(1.1")
Aperture	F11.8
Telecentricity	0.10°
NA	0.16841
Distortion	<0.1%
Depth of Field (mm)	0.06
Resolution (μm)	6.25
Image MTF30 (lp/mm)	80
Field of View Ø (mm)	4.6
O/I Distance (mm)	252.6
Mount	C-Mount
Weight (kg)	0.51
Size (mm)	Ø 45×170.1
Filter Thread (mm)	M35×0.5-6H
Working Temperature	-20℃~+60℃

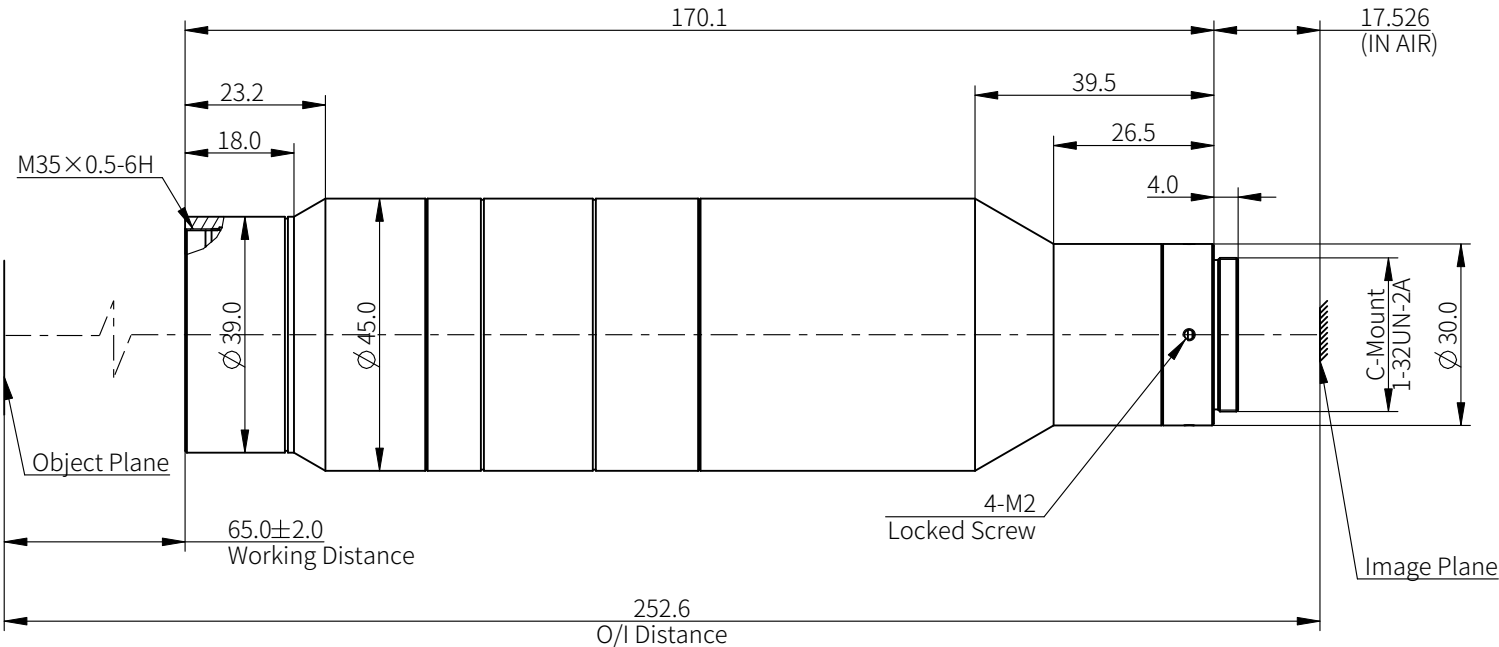

[1]Resolution:The resolution is the image resolution.
[2]DOF evaluation formula for telecentric lenses:

DOF(mm)= $\frac{F\# \times P \times k}{\beta \times \beta}$

F#:The real F-number of a lens when used
P:Sensor pixel size (5.5 μm used here)
β: Lens magnification
k:The parameter based on application (measurement, k=0.015; defect detection, k=0.008; 0.015 used here)

At the borders of DOF,the image can still be used for measurement. But only half of the nominal DOF should be used to get a sharp image.

View Angle		Item	Signature	Date	 OPT Machine Vision Tech Co., Ltd.			
		Drawing						
Standard Difference	IT14	Design			All Rights Reserved			
		Check						
Drawing Code		Scale	4:5		Name	OPT-HP40-65-F12		
		Paper Size	A4		Unit	mm	Page 1 / 1	Version V1.0